

HAILO S1 10 PRO

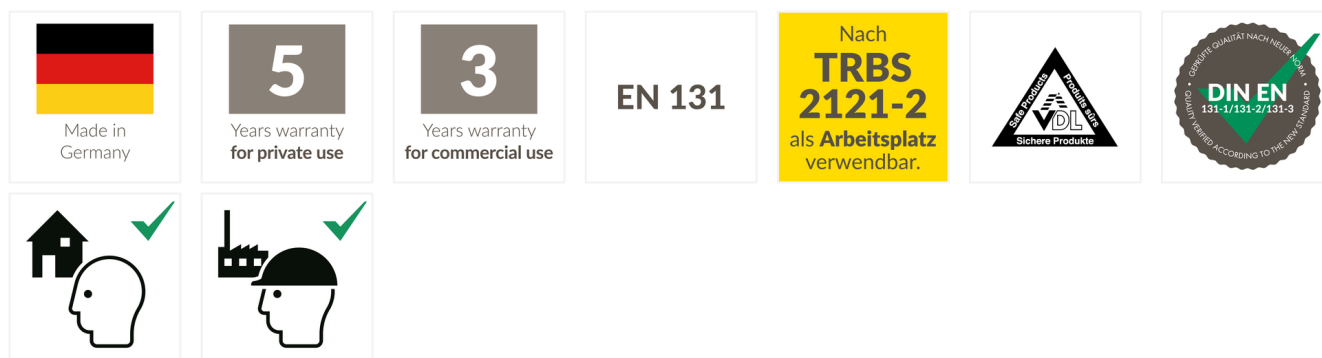
The multi-purpose ladder with innovative rotating steps.

THE KEY FEATURES





- INNOVATION: 3 rotating steps with large tread and with one hand unlocking system enable safe and ergonomic working on the ladder
- LOT system: compensates for surface unevenness up to 15 cm, adjustment by foot pedal
- Versatile - can be used as a simple or double ladder
- Spring-assisted locking hook with transport safety mechanism

OTHER PRODUCT ADVANTAGES







- Length and crossprofiled rungs
- Non-slip surface contact feet
- Sturdy crosspiece with large claw feet
- Extremely sturdy thanks to double-beaded rail-rung joins
- Non-removable second ladder section
- Max. load capacity 150 kg



SPECIFICATIONS

Level of equipment		5
TRBS 2121-2		✓
Rotating steps		✓
LOT System		✓
Locking hook with transport locking mechanism		✓
Can be used as lean-to ladder or free-standing ladder		✓
Can be used in a free-standing position		✓
Can be used as lean-to ladder		✓
Material		Aluminium / steel / plastic
Number of rungs		2 x 12
Width/depth required for setting up lean-to ladder		A = 149 cm, B = 151 cm
Width/depth required for setting up trestle ladder		A = 149 cm, B = 219 cm
Height of lean-to ladder		563 cm



Height of trestle ladder		339 cm
Max. working height		661 cm
Max. working height of lean-to ladder		661 cm
Max. working height of trestle ladder		465 cm
Dimensions of packaging (HxWxD)		A = 335 cm, B = 42 cm, C = 16 cm
Weight		24,0 kg
Load capacity		150 kg